

Ricevitore HDMI su rete IP per la serie di prodotti IH2006, 4K 60Hz, senza driver, AVoIP, include kit di montaggio, solo ricevitore

ID prodotto: IH2006-HDMI-RX




The AVoIP HDMI Receiver extends a 4K 60Hz HDMI signal over an existing TCP/IP network when paired with a compatible transmitter, keeping systems secure from unauthorized access and physical damage.

The plug-and-play design requires no drivers or software and is compatible with all major operating systems, including Windows, macOS, and Linux, as well as hardware platforms like Intel, AMD, Snapdragon/ARM, and Apple Silicon.

Easily expand your setup by adding multiple receivers to create a one-to-many configuration, making it easy to scale with your business needs for flexible and future-proof IP Video or KVM distribution.

Receiver features a durable metal housing with mounting kits for wall or under-desk installation, plus rubber feet for desktop stability. RS232 and 3.5mm audio passthrough ports enable serial and audio extension.

## Certificazioni, report e compatibilità

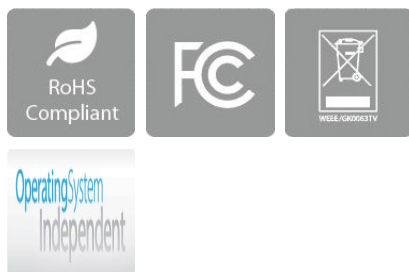

## Applicazioni

- Reduce the need for physical access to a computer or server, improving security and efficiency
- Enables secure, high-performance connections between workstations and studio equipment
- Allows operators to manage critical systems from a safe or more convenient location

## Caratteristiche

- **AVoIP HDMI RECEIVER:** When paired with an IH2006 transmitter (sold separately), extend a 4K 60Hz HDMI signal over a TCP/IP network to a remote display, enabling high-quality video distribution while keeping the source system secure
- **SCALABLE SETUP:** Easily expand your setup by adding multiple receivers to create a one-to-many configuration, making it easy to scale with your business needs for flexible and future-proof IP Video or KVM distribution
- **NO DRIVERS OR SOFTWARE:** Requires no configuration to get it working; Compatible with any operating system including Windows, macOS and Linux, as well as all hardware platforms such as Intel, AMD, Snapdragon/ARM and Apple Silicon
- **AUDIO & SERIAL EXTENSION:** Equipped with a three-wire RS232 port for serial extension and a 3.5mm audio passthrough port, ensuring seamless transmission of audio and control signals over the network
- **SECURE & FLEXIBLE INSTALLATION:** Durable metal housing with included mounting kit for wall or under-desk installation; Rubber feet prevent slipping for desktop use; Ideal for industrial and professional environments

---

### Hardware

|                   |         |
|-------------------|---------|
| Norme di garanzia | 2 Years |
| Audio             | Sì      |
| Porte KVM         | 1       |
| Tipo video PC     | HDMI    |
| Montaggio a rack  | No      |
| Cavi inclusi      | No      |

---

### Prestazioni

|                                       |    |
|---------------------------------------|----|
| Supporto OSD e tasti di scelta rapida | No |
|---------------------------------------|----|

|                              |                        |
|------------------------------|------------------------|
| Video Revision               | HDMI 2.0               |
| Controllo IP                 | Sì                     |
| Hot-Key Selection            | No                     |
| Risoluzioni digitali massime | 3840 x 2160 @ 60Hz     |
| Specifiche audio             | HDMI - 2 Channel Audio |
| Supporto selezione porte     | Non applicabile        |

---

#### Connettore/i

|                    |                                                                                         |
|--------------------|-----------------------------------------------------------------------------------------|
| Interfacce console | 1 - Blocco terminale (3 fili)<br>1 - 3.5mm Stereo Female 3 pos<br>1 - RJ-45<br>1 - HDMI |
| Altre Interfacce   | 1 - USB micro-B (5 pin)                                                                 |

---

#### Software

|                                     |                                          |
|-------------------------------------|------------------------------------------|
| Compatibilità con sistemi operativi | Non è necessario alcun driver o software |
|-------------------------------------|------------------------------------------|

---

#### Indicatori

|                |                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Indicatori LED | 1 - Power LED:<br>Solid Blue: Indicates the unit is receiving Power<br><br>1 - Sync LED:<br>Off: Transmitter and Receiver have no established a connection<br><br>Slow Orange Flash: Transmitter and Receiver are connected via Gigabit Ethernet but no Video is transmitting<br><br>Quick Orange Flash: Transmitter and Receiver are connected via 100Mbps Ethernet but no Video is transmitting<br><br>Solid Orange: Video is transmitting |
|----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

---

## Alimentazione

|                        |                       |
|------------------------|-----------------------|
| Fonte di Alimentazione | Adattatore CA incluso |
| Tensione ingresso      | 100 - 240 AC          |
| Corrente ingresso      | 0.3A                  |
| Tensione di uscita     | 5 DC                  |
| Corrente di uscita     | 2A                    |
| Tipo punta centrale    | Positivo              |
| Tipo presa             | M                     |
| Consumo energetico     | 10W                   |

## Ambientale

|                              |                                |
|------------------------------|--------------------------------|
| Temperatura d'esercizio      | -20°C to 60°C (-4°F to 140°F)  |
| Temperatura di conservazione | -30°C to 70°C (-22°F to 158°F) |
| Umidità                      | 0% ~ 90% RH (senza condensa)   |

## Caratteristiche fisiche

|                    |                 |
|--------------------|-----------------|
| Colore             | Nero            |
| Tipo enclosure     | Acciaio         |
| Lunghezza prodotto | 0.0 in [0.0 mm] |
| Larghezza prodotto | 0.0 in [0.0 mm] |
| Altezza prodotto   | 0.0 in [0.0 mm] |
| Peso prodotto      | 0.0 oz [0.0 g]  |

## Informazioni confezione

|                      |                  |
|----------------------|------------------|
| Lunghezza Confezione | 5.9 in [14.9 cm] |
| Package Width        | 7.8 in [19.9 cm] |
| Package Height       | 3.1 in [8.0 cm]  |

|                               |                                 |                                                                                                                                                                                                          |
|-------------------------------|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                               | Peso spedizione<br>(confezione) | 1.1 lb [0.5 kg]                                                                                                                                                                                          |
| <hr/>                         |                                 |                                                                                                                                                                                                          |
| Contenuto della<br>confezione | Incluso nella<br>confezione     | <p>1 - IP HDMI Receiver</p> <p>1 - Confezione di piedini in gomma</p> <p>1 - RS-232 Terminal Header</p> <p>1 - Kit di montaggio</p> <p>1 - Adattatore di alimentazione universale<br/>(NA/UK/UE/ANZ)</p> |
| <hr/>                         |                                 |                                                                                                                                                                                                          |

\* L'aspetto e le specifiche dell'articolo sono soggetti a modifiche senza preavviso.