# Canon

## Canon PIXMA TR4750i Ad inchiostro A4 4800 x 1200 DPI Wi-Fi

**Marchio :** Canon     **Famiglia del prodotto:** PIXMA     **Codice prodotto:** 5074C006
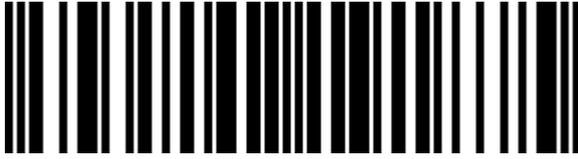
**Nome del prodotto :** TR4750i

4 in 1, A4, 4800 x 1200 dpi, 8.8/4.4 ipm, Auto Duplex, USB, Wi-Fi, LCD
Canon PIXMA TR4750i. Tecnologia di stampa: Ad inchiostro, Stampa: Stampa a colori, Risoluzione massima: 4800 x 1200 DPI. Copia: Copia a colori. Scansione: Scansione a colori, Risoluzione di scansione ottica: 600 x 1200 DPI. Fax: Fax a colori. Funzione duplex: Stampa. Massimo formato carta serie ISO A: A4. Wi-Fi. Stampa diretta. Colore del prodotto: Nero

PIXMA PRINT PLAN

### Printing

| | |
|---|---|
| Duplex printing mode | Auto |
| Print technology * | Inkjet |
| Printing * | Colour printing |
| Duplex printing * | ✔ |
| Maximum resolution * | 4800 x 1200 DPI |
| Print speed (ISO/IEC 24734) mono | 8.8 ipm |
| Print speed (ISO/IEC 24734) colour | 4.4 ipm |
| Time to first page (black, normal) | 11 s |
| Time to first page (colour, normal) | 19 s |
| Borderless printing | ✔ |

### Copying

| | |
|---|---|
| Copying * | Colour copying |
| Maximum number of copies | 99 copies |
| Copier resize | 25 - 400% |
| N-in-1 copy function | ✔ |
| N-in-1 copy function (N=) | 2, 4 |
| ID-card copy function | ✔ |
| Edge erase function | ✔ |
| PC free copying | ✔ |

### Scanning

| | |
|---|---|
| Scanning * | Colour scanning |
| Optical scanning resolution * | 600 x 1200 DPI |
| Maximum scan area | 216 x 356 mm |
| Scanner type * | Flatbed & ADF scanner |
| Scan technology | CIS |
| Input colour depth | 16 bit |
| Output colour depth | 8 bit |

### Paper handling

| | |
|---|---|
| Maximum ISO A-series paper size * | A4 |
| Paper tray media types * | Envelopes, Glossy paper, High resolution paper, Matte paper, Photo paper, Plain paper, Semi-glossy paper |
| ISO A-series sizes (A0...A9) * | A4, A5, A6 |
| ISO B-series sizes (B0...B9) | B5 |
| Non-ISO print media sizes | Legal, Letter |
| Envelopes sizes | Com-10, DL |
| Photo paper sizes | 10x15,13x18,20x25 |
| Photo paper sizes (imperial) | 4x6,5x7,8x10 |
| Custom media width | 101.6 - 215.9 mm |
| Custom media length | 152.4 - 676 mm |

### Ports & interfaces

| | |
|---|---|
| Direct printing * | ✔ |
| USB port * | ✔ |
| USB connector | USB Type-B |

### Network

| | |
|---|---|
| Wi-Fi * | ✔ |
| Ethernet LAN * | ✘ |
| Wi-Fi standards | 802.11b, 802.11g, Wi-Fi 4 (802.11n) |
| Security algorithms | WEP, WPA-PSK, WPA2-PSK |
| Mobile printing technologies | Apple AirPrint, Mopria Print Service, PIXMA Cloud Link |

### Design

| | |
|---|---|
| Product colour * | Black |
| Market positioning * | Home & office |
| Built-in display * | ✔ |

## Scanning

| | |
|---|---|
| Input greyscale depth | 16 bit |
| Output greyscale depth | 8 bit |

## Fax

| | |
|---|---|
| Faxing * | Colour faxing |
| Fax resolution (black) | 300 x 300 DPI |
| Fax transmission speed | 3 sec/page |
| Modem speed | 33.6 Kbit/s |
| Fax memory | 50 pages |

## Features

| | |
|---|---|
| Maximum duty cycle * | 1200 pages per month |
| Duplex functions * | Print |
| Number of print cartridges * | 2 |
| Printing colours * | Black, Cyan, Magenta, Yellow |

## Input & output capacity

| | |
|---|---|
| Total number of input trays * | 1 |
| Total input capacity * | 100 sheets |
| Auto document feeder (ADF) | ✔ |
| Auto document feeder (ADF) input capacity | 20 sheets |

## Design

| | |
|---|---|
| Display | LCD |
| Control type | Buttons |

## Power

| | |
|---|---|
| Power consumption (copying) | 7 W |
| Power consumption (off) | 0.3 W |
| AC input voltage | 100 - 240 V |
| AC input frequency | 50 - 60 Hz |

## System requirements

| | |
|---|---|
| Windows operating systems supported | Windows 10, Windows 7, Windows 8.1 |
| Mac operating systems supported | Mac OS X 10.13 High Sierra, Mac OS X 10.14 Mojave, Mac OS X 10.15 Catalina, Mac OS X 10.15.3 Catalina, Mac OS X 11.0 Big Sur, Mac OS X 12.0 Monterey, Mac OS X 13.0 Ventura |
| Mobile operating systems supported | Android, iOS, iPadOS |
| Other operating systems supported | ChromeOS |

## Operational conditions

| | |
|---|---|
| Operating relative humidity (H-H) | 10 - 90% |
| Operating temperature (T-T) | 5 - 35 °C |

## Weight & dimensions

| | |
|---|---|
| Width | 435 mm |
| Depth | 295 mm |
| Height | 189 mm |
| Weight | 5.8 kg |

## Packaging content

| | |
|---|---|
| Cartridge(s) included | ✔ |
| Cables included | AC |

4549292191875