Canon

Canon PIXMA TS7450a Ad inchiostro A4 4800 x 1200 DPI Wi-Fi

Marchio : Canon **Famiglia del prodotto:** PIXMA **Codice prodotto:** 4460C056
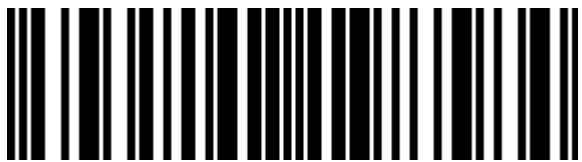
Nome del prodotto : TS7450a

Canon PIXMA TS7450a. Tecnologia di stampa: Ad inchiostro, Stampa: Stampa a colori, Risoluzione massima: 4800 x 1200 DPI. Copia: Copia a colori. Scansione: Scansione a colori, Risoluzione di scansione ottica: 1200 x 2400 DPI. Funzione duplex: Stampa. Massimo formato carta serie ISO A: A4. Wi-Fi. Stampa diretta. Colore del prodotto: Nero

Printing

Duplex printing mode	Auto
Print technology *	Inkjet
Printing *	Colour printing
Duplex printing *	✔
Maximum resolution *	4800 x 1200 DPI
Print speed (ISO/IEC 24734) mono	13 ipm
Print speed (ISO/IEC 24734) colour	6.8 ipm
Borderless printing *	✔

Copying

Copying *	Colour copying
Maximum number of copies	99 copies
Copier resize	25 - 400%
N-in-1 copy function	✔
N-in-1 copy function (N=)	2

Scanning

Scanning *	Colour scanning
Optical scanning resolution *	1200 x 2400 DPI
Scanner type *	Flatbed & ADF scanner
Scan technology	CIS
Input colour depth	16 bit
Output colour depth	8 bit
Input greyscale depth	16 bit
Output greyscale depth	8 bit

Fax

Faxing *	✘

Features

Duplex functions *	Print
Number of print cartridges *	2

Input & output capacity

Total number of input trays *	1
Total input capacity *	100 sheets
Auto document feeder (ADF)	✔
Auto document feeder (ADF) input capacity	35 sheets

Paper handling

Maximum ISO A-series paper size *	A4
Paper tray media types *	Envelopes, Photo paper, Plain paper
ISO A-series sizes (A0...A9) *	A4, A5

Paper handling

Custom media width	55 - 215.9 mm
Custom media length	89 - 676 mm
Paper tray media weight	64 - 105 g/m²

Ports & interfaces

Direct printing *	✔
USB port	✔
USB connector	USB Type-B

Network

Wi-Fi *	✔
Ethernet LAN *	✘
Wi-Fi standards	802.11b, 802.11g, Wi-Fi 4 (802.11n)
Security algorithms	WEP, WPA-PSK, WPA2-PSK
Mobile printing technologies	Apple AirPrint, Mopria Print Service, PIXMA Cloud Link

Design

Product colour *	Black
Market positioning *	Home & office
Built-in display *	✔
Display	OLED
Display diagonal	3.66 cm (1.44")

Power

Power consumption (copying)	14 W
Power consumption (off)	0.3 W
AC input voltage	100 - 240 V
AC input frequency	50 - 60 Hz

System requirements

Windows operating systems supported	Windows 10, Windows 7, Windows 8.1
Mac operating systems supported	Mac OS X 10.12 Sierra, Mac OS X 10.13 High Sierra, Mac OS X 10.14 Mojave, Mac OS X 10.15 Catalina, Mac OS X 10.15.3 Catalina, Mac OS X 10.2 Jaguar, Mac OS X 10.3 Panther, Mac OS X 10.4 Tiger, Mac OS X 10.5 Leopard, Mac OS X 10.6 Snow Leopard, Mac OS X 10.7 Lion, Mac OS X 10.8 Mountain Lion, Mac OS X 10.9 Mavericks, Mac OS X 11.0 Big Sur
Mobile operating systems supported	Android, iOS
Other operating systems supported	ChromeOS

Paper handling

ISO B-series sizes (B0...B9)	B5
Non-ISO print media sizes	Letter
Envelopes sizes	Com-10, DL
Photo paper sizes	10x15,13x18,13x13,20x25
Borderless printing media sizes	10x15, 13x18, 13x13, 20x25, A4, B5, Letter

Operational conditions

Operating relative humidity (H-H)	10 - 80%
Storage temperature (T-T)	15 - 30 °C

Weight & dimensions

Width	403 mm
Depth	364 mm
Height	206 mm
Weight	8.2 kg

Packaging content

Cartridge(s) included	✔
Cables included	AC

Logistics data

Harmonized System (HS) code	84433100

4549292198584