

Samsung OH55A-S Pannello piatto per segnaletica digitale 139,7 cm (55") VA 3500 cd/m² Full HD Nero Tizen 5.0 24/7

Marchio : Samsung Famiglia del prodotto: OHA-S Codice prodotto: LH55OHAOSGBXEN


Nome del prodotto : OH55A-S

Samsung OH55A-S. Design del prodotto: Pannello piatto per segnaletica digitale. Dimensioni diagonale schermo: 139,7 cm (55"), Tecnologia display: VA, Risoluzione del display: 1920 x 1080 Pixel, Luminosità schermo: 3500 cd/m², Tipologia HD: Full HD. Ore di servizio (ore/giorni): 24/7. Sistema operativo incluso: Tizen 5.0. Colore del prodotto: Nero



Display		Design	
Display diagonal *	139.7 cm (55")	Bezel width (side)	2.49 cm
Display technology *	VA	Bezel width (top)	2.49 cm
Display resolution *	1920 x 1080 pixels	Performance	
Display brightness *	3500 cd/m²	Purpose *	Universal
HD type *	Full HD	Operating hours (hours/days)	24/7
Touchscreen *	✗	HDCP	✓
Response time	6 ms	International Protection (IP) code	IP56
Contrast ratio (typical)	6000:1	HDCP version	2.2
Dynamic contrast ratio marketing name	Mega Contrast	Power	
Viewing angle, horizontal	178°	Power consumption (typical) *	530 W
Viewing angle, vertical	178°	Power consumption (sleep)	0.5 W
Pixel pitch	0.63 x 0.63 mm	AC input voltage	100 - 240 V
Horizontal scan range	30 - 136 kHz	AC input frequency	50 - 60 Hz
Vertical scan range	24 - 75 Hz	Computer system	
Colour gamut	72%	Computer system *	✓
Ports & interfaces		Computer system type	System on Chip (SoC)
HDMI ports quantity *	2	Internal memory	8 GB
HDMI version	2.0	Operating system installed	Tizen 5.0
DVI port *	✗	Weight & dimensions	
USB port *	✓	Display width	1260.6 mm
USB ports quantity	1	Display depth	85 mm
Ethernet LAN *	✓	Display height	731.4 mm
Ethernet LAN (RJ-45) ports	2	Display weight	46.1 kg
Wi-Fi *	✗	Packaging data	
Audio (L/R) out	1	Package width	1358 mm
RS-232 interface	✓	Package depth	230 mm
HDBaseT input ports	1	Package height	845 mm
		Package weight	52.6 kg
Audio		Operational conditions	
Built-in speaker(s) *	✗	Operating temperature (T-T)	-30 - 50 °C
Design		Operating relative humidity (H-H)	10 - 80%
Product design *	Digital signage flat panel		
Placement supported *	Outdoor		

Design		Other features	
Orientation	Horizontal/Vertical	Audio output	1
Product colour *	Black	Flash memory	8000 MB
VESA mounting *	✓	RS-232 input ports	1
Panel mounting interface	1186 x 560 mm	RS-232 output ports	1
Bezel width (bottom)	2.49 cm	Glass protection	✓

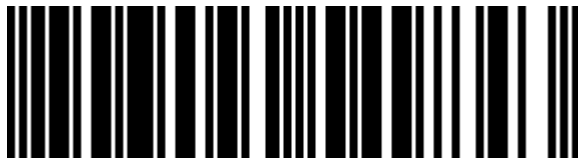

8806094549843

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 13-MAR-2025. Prints or copies of Information are only valid on the printed Publication date