



HP Poly Studio E60 Smart Camera 4K MPTZ with 12x Optical Zoom TAA

Marchio : HP Poly

Codice prodotto: 9W1A7AA

Nome del prodotto : Studio E60 Smart Camera 4K MPTZ with 12x Optical Zoom TAA

Poly Studio E60 Smart Camera 4K MPTZ with 12x Optical Zoom TAA

[HP Poly Studio E60 Smart Camera 4K MPTZ with 12x Optical Zoom TAA:](#)


Harness the power of focus

Keep presentations engaging with the Poly Studio E60 smart MPTZ optical zoom camera. The main presenter is always in frame, and every person in the room is shown with exceptional accuracy, even at the far end. With every detail captured, presentations are easier to follow.


HP Poly Studio E60 Smart Camera 4K MPTZ with 12x Optical Zoom TAA. Megapixel: 8 MP. Tipologia HD: 4K Ultra HD, Risoluzione massima video: 3840 x 2160 Pixel, Modalità video supportate: 2160p, Frequenza massima dei fotogrammi: 60 fps. Zoom ottico: 12x. Colore del prodotto: Nero



Macchina fotografica		Condizioni ambientali	
Megapixel *	8 MP	Intervallo di temperatura	-40 - 70 °C
Risoluzione seconda fotocamera	8 MP	Contenuto dell'imballo	
Zoom fotocamera	✓	Scheda di garanzia	✓
Zoom ottico	12x	Requisiti di sistema	
campo di visione orizzontale	107°	Sistema operativo Windows supportato	✓
Controllo PTZ	✓	Sistema operativo mobile supportato	Android
Video		Prestazione	
Tipologia HD *	4K Ultra HD	Blocco cavo	✓
Risoluzione massima video *	3840 x 2160 Pixel	Tipologia slot blocco cavo	Kensington
Frequenza massima dei fotogrammi *	60 fps	Dettagli tecnici	
Modalità video supportate	2160p	Peso del pallet	378 kg
Design		Collegamento in rete	
Colore del prodotto *	Nero	Velocità trasferimento Ethernet LAN	10,100,1000 Mbit/s
Paese di origine	Cina	Dati logistici	
Connettività		Codice UNSPSC	45121520
Quantità di porte Power over Ethernet plus (PoE+)	1	Dimensioni e peso	
Quantità porte Ethernet LAN (RJ-45)	1	Larghezza	200 mm
Gestione energetica		Profondità	150 mm
Tipologia alimentazione	AC, dC, PoE	Altezza	165 mm
Tensione di ingresso AC	12 V	Peso	1,79 kg
Voltaggio input DC	12 V	Dati su imballaggio	
Condizioni ambientali		Larghezza imballo	295 mm
Intervallo temperatura di funzionamento	0 - 40 °C	Profondità imballo	245 mm
		Altezza imballo	242 mm
		Peso dell'imballo	3,99 kg

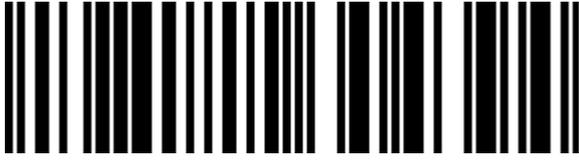

0198122304394



198122304394

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.