

StarTech.com Scheda combo seriale/parallela PCI Express nativa 2S1P con 16550 UART

Marchio : StarTech.com

Codice prodotto: PEX2S5531P

Nome del prodotto : Scheda combo seriale/parallela PCI Express nativa 2S1P con 16550 UART



StarTech.com Scheda combo seriale/parallela PCI Express nativa 2S1P con 16550 UART
 StarTech.com Scheda combo seriale/parallela PCI Express nativa 2S1P con 16550 UART. Interfaccia host: PCIe, Interfaccia di uscita: Seriale, Scheda di espansione standard: PCIe 1.0a. Colore del prodotto: Verde, Acciaio inox. Chipset: ASIX - MCS9901CV-CC, Baud rate: 460,8 Kbit/s, FIFO (Primo ad entrare, Primo ad uscire): 128 B. Sistema operativo Windows supportato: Windows 10 Education, Windows 10 Education x64, Windows 10 Enterprise, Windows 10 Enterprise x64,...., Compatibilità sistema operativo Mac: Mac OS X 10.4 Tiger, Mac OS X 10.5 Leopard, Mac OS X 10.6 Snow Leopard, Mac OS X 10.7 Lion, Mac OS..., Sistemi operativi server supportati: Windows Server 2003, Windows Server 2008 R2, Windows Server 2012, Windows Server 2012 R2, Windows.... Larghezza: 120 mm, Profondità: 105 mm, Altezza: 20 mm




Connettività		Requisiti di sistema	
Interfaccia host *	PCIe	Sistema operativo Linux supportato	✓
Interfaccia di uscita *	Seriale	Sistemi operativi server supportati	Windows Server 2003, Windows Server 2008 R2, Windows Server 2012, Windows Server 2012 R2, Windows Server 2016, Windows Server 2019
Scheda di espansione standard	PCIe 1.0a	Altri sistemi operativi supportati	Windows Embedded POSReady 2009, Windows Embedded Standard 2009
Porte seriali	2		
Tipo interfaccia seriale	RS-232		
Porta parallela	1		
Design		Dettagli tecnici	
Interno *	✓	Certificati di conformità	CE, RoHS
Colore del prodotto	Verde, Acciaio inox	Dimensioni e peso	
Caratteristiche		Larghezza	120 mm
Chipset	ASIX - MCS9901CV-CC	Profondità	105 mm
Baud rate	460,8 Kbit/s	Altezza	20 mm
FIFO (Primo ad entrare, Primo ad uscire)	128 B	Peso	112 g
Tipo di controllo di flusso	DTR/DSR, RTS/CTS, XON/XOFF	Dati su imballaggio	
Protocolli supportati	EPP, ECP, SPP, PS/2	Drivers inclusi	✓
Condizioni ambientali		Manuale dell'utente	✓
Intervallo temperatura di funzionamento	-10 - 80 °C	Larghezza imballo	145 mm
Intervallo di temperatura	-20 - 100 °C	Profondità imballo	174 mm
Range di umidità di funzionamento	5 - 85%	Altezza imballo	31 mm
		Peso dell'imballo	208 g
		Dati logistici	
		Codice del Sistema Armonizzato (SA)	84733020
		Quantità per cartone principale	75 pz
		Larghezza scatola principale	355 mm


Requisiti di sistema		Dati logistici	
Sistema operativo Windows supportato	Windows 10 Education, Windows 10 Education x64, Windows 10 Enterprise, Windows 10 Enterprise x64, Windows 10 Home, Windows 10 Home x64, Windows 10 Pro, Windows 10 Pro x64, Windows 2000, Windows 2000 Professional, Windows 7 Enterprise, Windows 7 Enterprise x64, Windows 7 Home Basic, Windows 7 Home Basic x64, Windows 7 Home Premium, Windows 7 Home Premium x64, Windows 7 Professional, Windows 7 Professional x64, Windows 7 Starter, Windows 7 Starter x64, Windows 7 Ultimate, Windows 7 Ultimate x64, Windows 8, Windows 8 Enterprise, Windows 8 Enterprise x64, Windows 8 Pro, Windows 8 Pro x64, Windows 8.1, Windows 8.1 Enterprise, Windows 8.1 Enterprise x64, Windows 8.1 Pro, Windows 8.1 Pro x64, Windows 8.1 x64, Windows 95, Windows 98SE, Windows CE, Windows ME, Windows Vista Business, Windows Vista Business x64, Windows Vista Enterprise, Windows Vista Enterprise x64, Windows Vista Home Basic, Windows Vista Home Basic x64, Windows Vista Home Premium, Windows Vista Home Premium x64, Windows Vista Ultimate, Windows Vista Ultimate x64, Windows XP Home, Windows XP Home x64, Windows XP Professional, Windows XP Professional x64	Lunghezza del cartone principale	679 mm
	Mac OS X 10.4 Tiger, Mac OS X 10.5 Leopard, Mac OS X 10.6 Snow Leopard, Mac OS X 10.7 Lion, Mac OS X 10.8 Mountain Lion, Mac OS X 10.9 Mavericks	Altezza scatola principale	320 mm
Compatibilità sistema operativo Mac			




0065030841764



065030841764

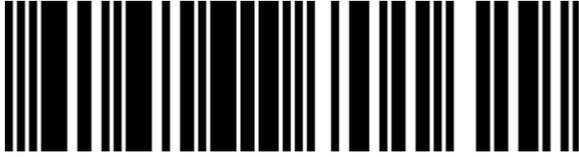

0616268701629



616268701629

Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.